



ZAZA2 PC

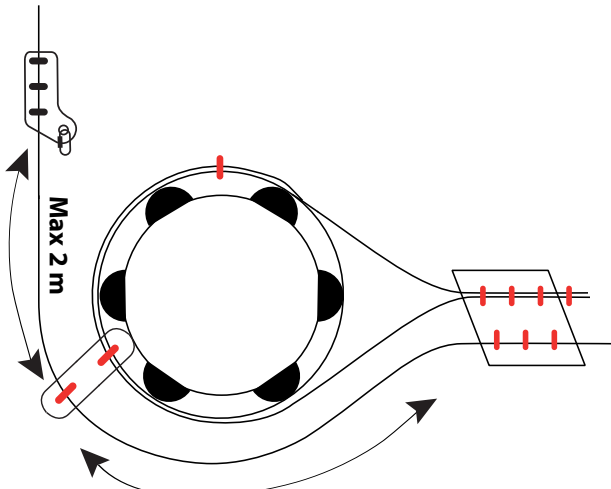

Never use these plate for the beginning or th end of any games or zipline

 = FLEXIBLE TENSION

AVANTAGES

- Lifeline support
- Fluidity of passage of the hook in the bypassing



CT/WLL 3 kN


Safety Line :
ø 12 mm or 1/2 "

Galvanized steel wire rope with metal core :

- 7x19 / 1x19
- Non rotating wire rope
- 6x26 Swaged

ADAPTABLE

STD 12
or
ZAZA2 JAWS




STANDARDS

EN 15567-1
EN 13411-1/7







STAINLESS STEEL

INOX 316L




X1
ZAZA2 PC

X2  **STD 12**
or
X1  **STD 12**
x1  **ZAZA2 JAWS**


WASHER STAINLESS
= A2 : M10x20
INOX A2
 **x4**

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-1/7
STANDARDS -ACCT


FIXING SYSTEMS

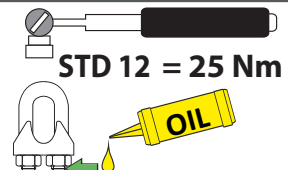

STD 12 = 25 Nm

OIL

OR

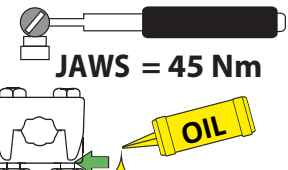

JAWS = 45 Nm

OIL

