W9605XX00 Version: 04/2019




Protective eye shield suitable for industrial work and construction sites. Fulfills the EN 1661 F. Its main purpose is to protect the user against fast-moving particles. The Cover is compatible with the Singing Rock FLASH helmet family. Cannot be used separately or with another helmets.

DESCRIPTION



KEY FEATURES

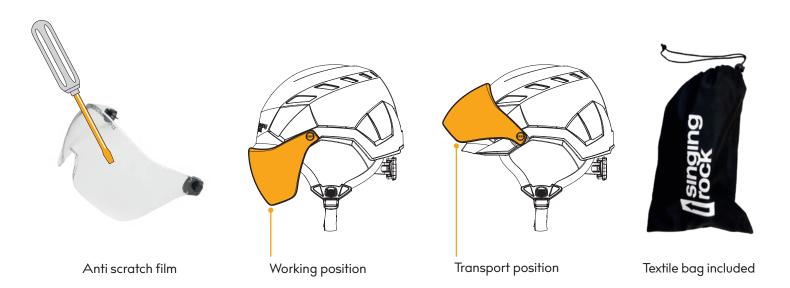

STANDARDS

Fulfills the EN 166 $/\ 1\ /\ F$

- I... First optical quality
- F... Increased resistance against fast flying particles
- Shield is clear and do not have any protection against UV radiation

FEATURES







guarantee



W9605XX00 Version: 04/2019

MATERIALS



THE SHIELDS COMPATIBLE HELMETS

HELMET TYPE	COLORS	STANDARDS				→		EN 397 EN 12492
FLASH Acces		C € 1015	min. 50 kg	440 ∨ a. c.	-30 °C	<	\bowtie	<
FLASH Industry		EN 397 C € 1015	min. 15 kg max. 25 kg	440 ∨ a. c.	-30 °C	<	\approx	<
FLASH Aero		C € 1015	min. 50 kg	\approx	-10 °C	\bowtie	<	<

MAINTENANCE

Lifetime of this product depends on the frequency and the environment in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 10 years from the date of production.













However mechanical damage can occur during the first use, which can $% \left(1\right) =\left(1\right) \left(1\right)$ limit the lifetime of this products only to its first use.

drying UV chemicals

read instruction

