
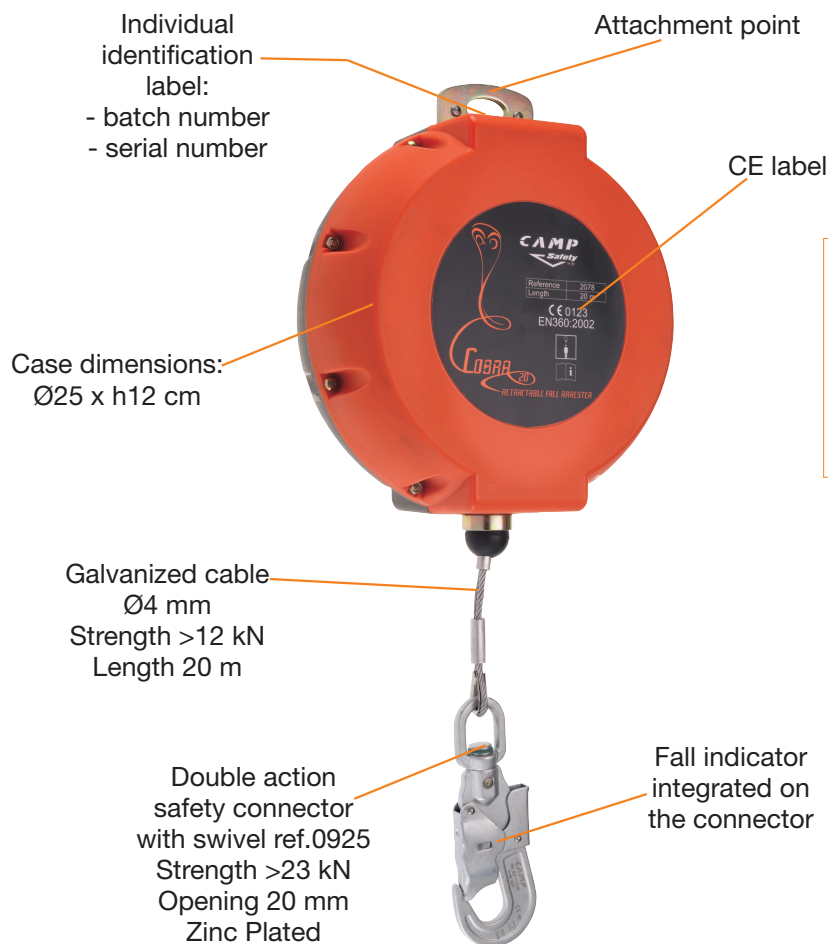


Retractable fall arrester EN 360, cable length 20 m.
Cable extends and retracts automatically following the movements of the user. Maximum force in the user. Maximum force in the event of fall <6 kN (internal shock absorption system).


Certified for vertical use (standard EN 360 certification), and horizontal applications over sharp edges conforming to european test 11.060 Type A (when used with Shock absorbing Lanyard ref.5030101, supplied separately).

CE EN 360


CONFINED ROOFS CONSTRUCTION PYLONS/INDUSTRY




Supplied with guiding cord Ø5 x 20 m, useful to guide the cable back into the retractor.



Vertical use

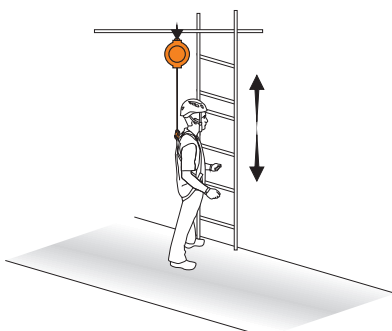

Horizontal use

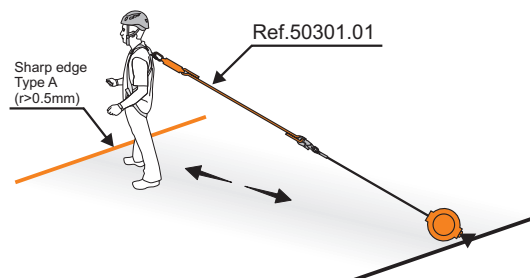

Horizontal Use Lanyard
Ref.5030101
(supplied separately)

