

# 7030206 SHOCK ABSORBER REWIND

DOUBLE 120-175 cm + 0981 + 2x0984



TECHNICAL SHEET

32 mm polyamide webbing lanyards with rewind elastic sewn in to automatically contract the lanyard and keep it out of the way when not in use.

Equipped with standard shock absorber (ref.2029).

CE EN 355

CONSTRUCTION


PYLONS/INDUSTRY

ROPE ACCESS



Shock Absorber  
Ref.2029  
Maximum extension:  
Fall factor 1= 90 cm  
Fall factor 2= 160 cm  
Maximum peak force:  
<6 kN (3.5-4.5 kN approx.)

Polamide tubular webbing  
Width 32 mm  
Elastic tape inside

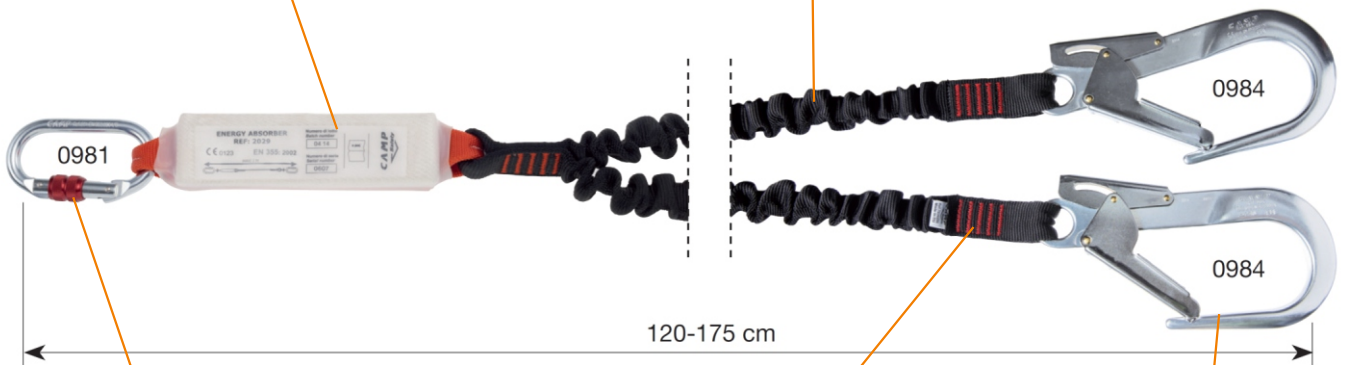

OVAL STANDARD LOCK Ref.0981  
Zinc plated carbon steel  
Breaking load 28 kN  
Opening 16 mm

High strength polyamid stitching  
Breaking load 22 kN

HOOK 60 mm opening  
Ref.0984  
Breaking load 25 kN