



Compact descender for work at heights designed mainly for rope access and rescue operations. Its advantages are durability, maximum simplicity and intuitive operation. With JACK, work is fun.

DESCRIPTION

During development, emphasis was placed on maximum simplicity, intuitive rope insertion and smooth operation.

Can be used for positioning, ascending and descending on the work line, as well as for lowering and belaying persons.

Using a screw, the device can be permanently locked to the rope to create a non-removable system.

No additional friction is required up to a load of 200 kg.

It is not necessary to disconnect the device from the harness when inserting and removing the rope.

Patented design with magnetic holding of the cam facilitates rope insertion.



Compatible with a wide range of rope diameters 9.3–12 mm (see specifications for individual standards).

Easy retrieval of the rope allows the device to be used for short rope ascents.

Parts in contact with the rope are made of stainless steel, which prolongs the lifetime of the device.

Speed of movement on the rope is conveniently controlled by the lever.

Lever and lock can be disassembled and cleaned if necessary.

Automatically locks the rope, allowing the user to concentrate fully on the work.

KEY FEATURES

- simplicity
- ergonomics
- robustness

STANDARDS

CE 1019

EN 12841-C, 10–12 mm, max. load: 200 kg
 EN 341-2A, SINGING ROCK STATIC II, max. load: 150kg, max. descent length: 100 m, min. temperature: -30 °C
 EN 15151-1 type 6, 9.3–11 mm

FEATURES



strength
15 kN



Ø 9.3–12 mm



410 g



unique
number




warranty

MATERIALS



- 45 % stainless steel
- 27 % light alloy
- 24 % hardened plastic
- 4 % galvanized steel

TECHNICAL DATA

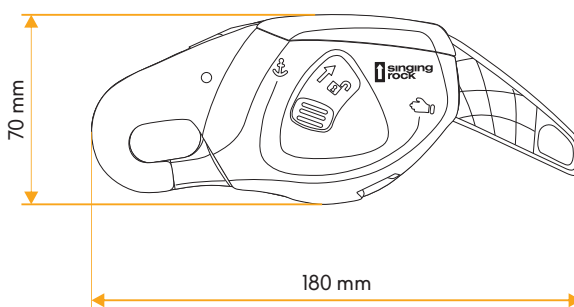

COMPARISON

JACK - SIR

- SIR has an anti-panic feature, JACK does not have an anti-panic feature
- JACK does not need to be disconnected from the harness when installing the rope
- more ergonomic and easier to operate



SIR

MAINTENANCE

Lifetime of this product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately.

If needed lubricate the mobile components with a silicone based lubricant.



beware of chemicals



beware of salt



cleaning



drying



silicon oil



read instructions

OTHER VIEWS



installation on the rope



usage



K0126BX00 – black version



RELATED PRODUCTS



SIR
K032SIR00



DSD plus
K031DSD00

ANTIPANIC	✓	
WEIGHT	365 g	421 g